

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 109 378 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
20.06.2001 Bulletin 2001/25

(51) Int Cl.7: **H04M 1/18, H04Q 7/32,
G01M 7/08**

(21) Application number: **00310486.6**

(22) Date of filing: **27.11.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Heikkinen, Kari-Pekka**
90570 Oulu (FI)

(74) Representative: **Read, Matthew Charles et al**
Venner Shipley & Co.
20 Little Britain
London EC1A 7DH (GB)

(30) Priority: **16.12.1999 US 465102**

(71) Applicant: **NOKIA MOBILE PHONES LTD.**
02150 Espoo (FI)

(54) **Device and method for monitoring a shock experienced by a mobile telephone**

(57) A system is devised for utilizing the speaker in a mobile phone or other appliance as a transducer for monitoring the shock to which the appliance is subject-

ed. The shock signal is processed and stored signals relative to said shock and providing means to access said stored data.

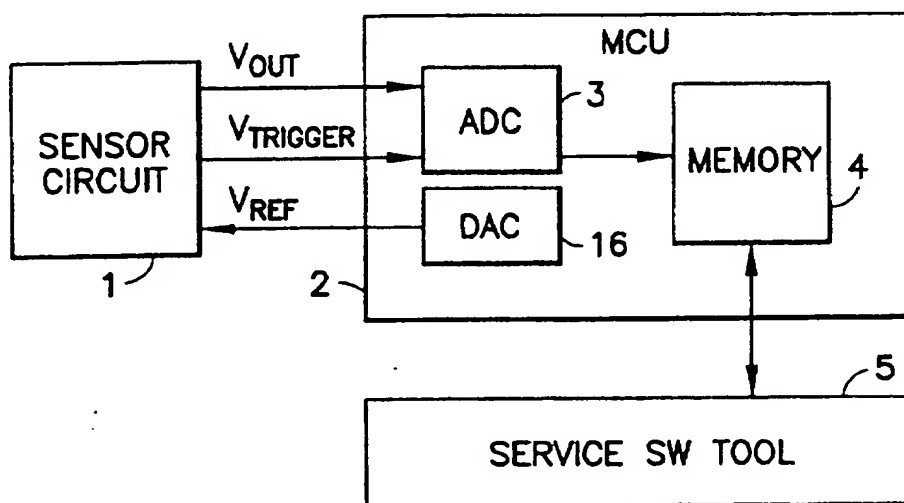


FIG. 1

Description

[0001] This invention relates to mobile electronic apparatus such as a mobile telephone handset.

[0002] Mobile phones are rapidly becoming an article for every day use. To accommodate this fact, manufacturers have reduced the size of such phones to make them easy to carry at all times. This has resulted in the mobile phone being subject to all of the hazards of the user's work and play. Similar to a watch, the mobile phone must now be shock resistant to an ever increasing standard. This increased exposure has strained the warranty services of the manufacturers because the phones are damaged in ways not contemplated on normal warranty conditions. Since there are circumstances beyond which damage is not covered by warranty, an issue arises with respect to the determination of excessive force.

[0003] It is a purpose of this invention to provide a simple and inexpensive means of monitoring the shock to which a mobile phone is subjected.

[0004] According to the invention, the dynamic speaker provided as standard equipment in many items of mobile electronic apparatus such as mobile phones, is used as a transducer to sense the shock experienced by the phone. Movement of the speaker core by an external force will produce a signal that is recorded in the memory of the phone. This can be accessed during service to determine if the phone was subjected to excessive force which may negate the warranty. The shock signal from the speaker is filtered and compared to a predetermined threshold. Therefore only the data relating to substantial force are recorded.

[0005] In order that the invention may be more fully understood an embodiment thereof will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 is a block diagram of a monitoring system used in the example of the invention;

Figure 2 is a block diagram of the sensor portion used in the example of the invention;

Figure 3 is a circuit diagram of the sensor portion;

Figure 4 is a schematic diagram of a speaker used in the example of the subject invention; and

Figure 5 is a graph showing the relationship V_{REF} , V_{OUT} , and $V_{TRIGGER}$.

[0006] The basic system of this invention is shown in figure 1. A sensor circuit 1 has its output connected to the microprocessor control unit 2 of a mobile phone. The analog signal from the sensor 1 is converted to a digital signal in the analog to digital converter 3 for storage in a random access memory 4 within the microprocessor

control unit 2. Memory 4 maybe accessed by a service processor 5 through the use of service software designed for that purpose.

[0007] The components of the sensor circuit 1 are shown in figure 2 and include a dynamic speaker 6 connected to a amplifier/filter circuit 7 and a comparator circuit 8. The amplifier/filter circuit 7 provides buffer impedance for the low impedance signal from the speaker 6 and if necessary may also provide amplification. Comparator circuit 8 receives a reference voltage V_{REF} from the microprocessor control unit 2 which is compared to the signal from speaker 6. In this manner, an output threshold is set to limit the shock signals to those greater than a minimum value, as it is only the extremes of shock forces that it is desired to record.

[0008] Although the signal from speaker 6 may be processed in a variety of ways to achieve the monitoring purpose of this invention, a specific sensor processing circuit 1 is shown in figure 3 for the purpose of illustration. In general because of the significant voltages generated by the speaker 6 when it receives a significant physical shock, amplification will not normally be required.

[0009] In the sensor circuit 1 shown in figure 3, the signal from the speaker 6 is passed through an amplifier/filter circuit 7 which provides buffer impedance for the low impedance signal of speaker 6 and filters out environmental disturbances. Circuit 7 includes an amplifier 9 and a filter 10. A voltage reference V_{REF} is set by microprocessor control unit 2, through a digital to analog converter 16 which facilitates alignment of the reference voltage during production. V_{REF} is compared to the output signal V_{OUT} of the amplifier/filter circuit 7 in comparator circuit 8, which includes an amplifier 17. Comparator circuit 8 is designed to generate a trigger pulse $V_{TRIGGER}$ when V_{OUT} is greater than V_{REF} . This requires significant peaks of voltage which indicate extraordinary shocks received by the mobile phone. As shown in figures 3 and 5, $V_{TRIGGER}$ will go to the positive supply voltage (+5V) of amplifier 17 and will be detected as an interrupt by microprocessor control unit 2 to initiate the storing of the value of V_{OUT} .

[0010] A unique feature of this invention is the use of the dynamic speaker of the mobile phone as a transducer to sense when the mobile phone is subjected to significant shock. A schematic of a typical speaker is shown in figure 4. In this illustration, speaker 6 is comprised of a cone 11 connected to a moveable core or diaphragm 12 which is mounted for movement within a wire coil or winding 13. The diaphragm 12 contains a permanent magnet 14 which, in normal use, is caused to move within the winding 13 in response to voice signals from a receiver in the mobile phone. In this instance, however, the speaker 6 is also used as a transducer by reversing its operation. Violent movement of the mobile phone will jar the diaphragm 13 and cause the magnet 14 to move within winding 13. This will induce a voltage in the winding 13 which acts as a pickup coil of a typical transducer.

The output voltage V_{SHOCK} of the transducer/speaker 6 will appear at output terminals 15 and be proportional to the force to which the mobile phone is subjected. V_{SHOCK} is processed by amplifier/filter 9 and comparator 10.

[0011] The shock signal is processed to eliminate spikes of voltage which may be caused by environmental disturbances or by minimal jarring during normal use. Peak signals are stored in the random access memory 4. When a mobile phone is submitted for warranty repair with, for example, the case damaged, but is otherwise servicable, the service technician may access the random access memory through an access port and, using a tool designed for this purpose download the shock signal record for analysis. Warranty service may be refused if the record indicates a misuse of the mobile phone.

[0012] In this manner a system for utilizing the transducer characteristics of a mobile phone is constructed. This system may be used in other devices which employ dynamic speakers such as portable radios, cordless phones, beepers and the like.

Claims

1. In apparatus containing a dynamic speaker, said speaker having a magnetized core and an input coil, a method of monitoring the shock to which the apparatus is subjected, comprising the steps of:

providing an alternative connection to said speaker to provide an output for the voltage signal generated by movement of said magnetized core within said input coil when the apparatus is subject to shock,

processing said signal to block the monitored signals which are below a predetermined minimum;

converting said signal to a digital signal; and

storing said signal in a microprocessor for future reference.

2. In apparatus containing a dynamic speaker, said speaker having a magnetized core and an input coil, a method of monitoring the shock to which the apparatus is subjected, as described in claim 1 further comprising the step of filtering said signal to isolate the shock signal from environmental disturbances.

3. In a mobile phone containing a dynamic speaker, said speaker having a magnetized core and an input coil, said mobile phone containing a microprocessor, a method of monitoring the shock to which the apparatus is subjected comprising the steps of:

providing an alternative connection to said speaker to provide an output for the voltage signal generated by movement of said magnetized core within said input coil, when said mobile phone is subject to shock,

processing said signal to block the monitored signals which are below a predetermined minimum;

converting said signal to a digital signal; and

storing said signal in said microprocessor for future reference.

4. In a mobile phone containing a dynamic speaker, said speaker having a magnetized core and an input coil, said mobile phone containing a microprocessor, a method of monitoring the shock to which the apparatus is subjected, as described in claim 3, further comprising the step of filtering said signal to isolate the shock signal from environmental disturbances.

5. In apparatus containing a dynamic speaker, said speaker having a magnetized core and an input coil, a device for monitoring the shock to which the apparatus is subjected comprising:

an output connected to the speaker coil for obtaining the voltage signal generated by movement of said magnetized core within said input coil when the device is subject to shock,

a processor connected to receive the filtered signal and to block the monitored signals which are below a predetermined minimum;

a microprocessor connected to receive the processed signal, convert said signal to digital form and to store said signal in said microprocessor for future reference.

6. In apparatus containing a dynamic speaker, said speaker having a magnetized core and an input coil, a device for monitoring the shock to which the apparatus is subjected, as described in claim 5, further comprising a filter connected to receive said signal and to isolate said signal from environmental disturbances.

7. In a mobile phone which uses a dynamic speaker, said speaker having a magnetized core and an input coil, said mobile phone having microprocessor control, a device for monitoring the shock to which the apparatus is subjected comprising:

an output connected to the speaker coil for ob-

taining the voltage signal generated by movement of said magnetized core within said input coil when the mobile phone is subject to shock;

a processor connected to receive the filtered signal and to block those monitored signals that are below a predetermined minimum;

said microprocessor control connected to receive the processed signal, convert said signal to digital form, and to store said signal in said microprocessor for future reference.

8. In a mobile phone which uses a dynamic speaker, said speaker having a magnetized core and an input coil, said mobile phone having microprocessor control, a device for monitoring the shock to which the apparatus is subjected, as described in claim 7, further comprising a filter connected to receive said signal and to isolate said signal from environmental disturbances.
9. Mobile electronic apparatus including a speaker (6) having a coil (13) and a magnetised element (14) to be moved by electrical energisation of the coil, **characterised by** a sensor circuit (1) responsive to relative movement of the coil (13) and the element (14) to sense mechanical shock suffered by the apparatus.
10. Apparatus according to claim 9 and comprising a mobile telephone handset.

35

40

45

50

55

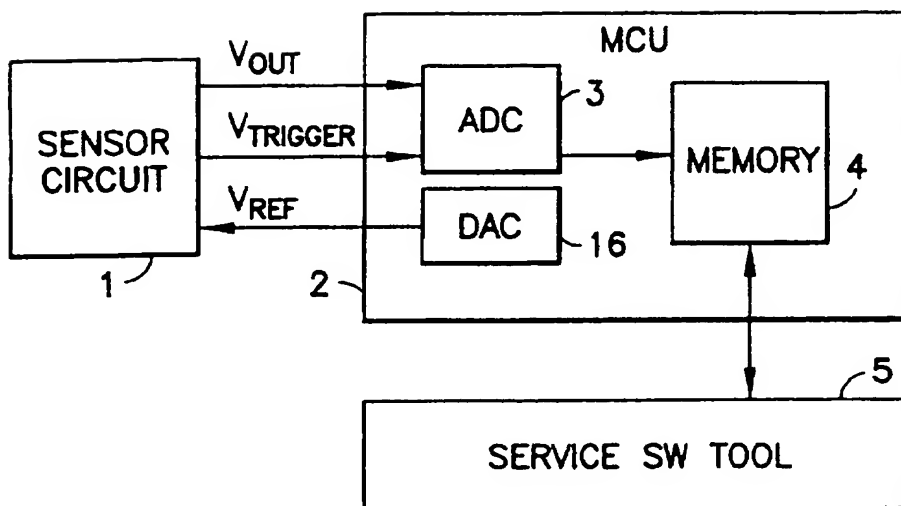


FIG.1

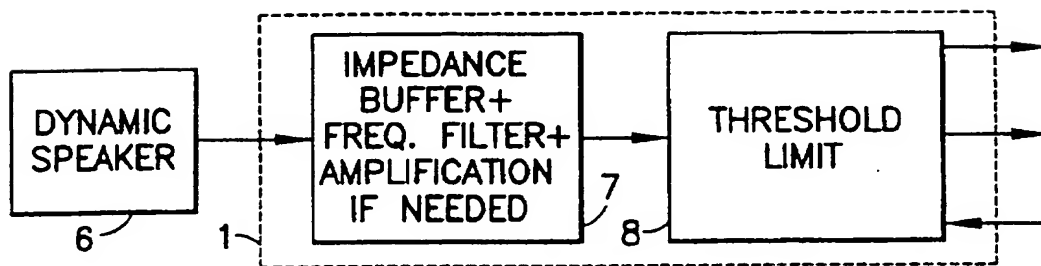


FIG.2

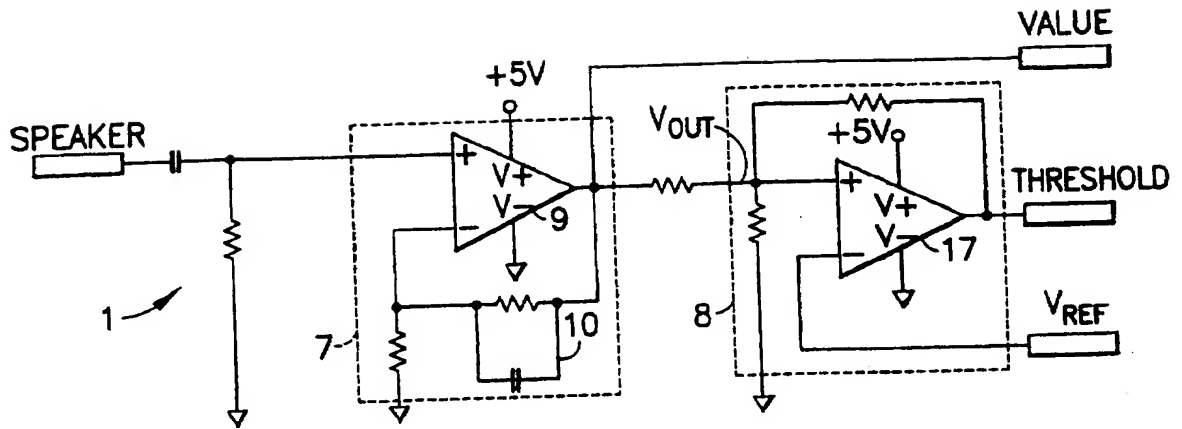


FIG.3

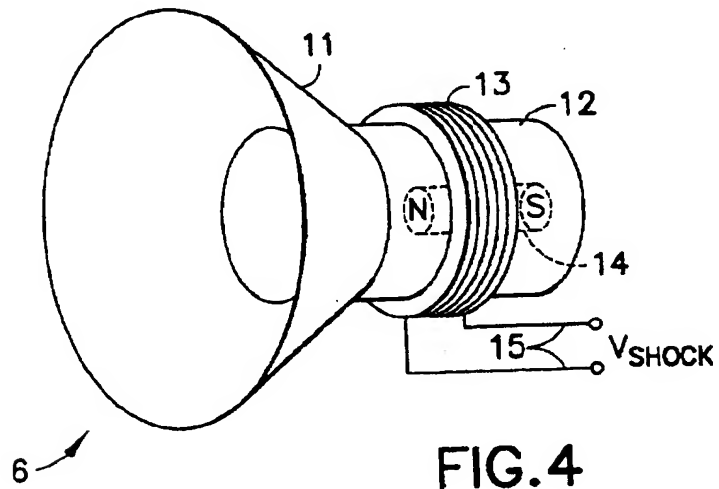


FIG.4


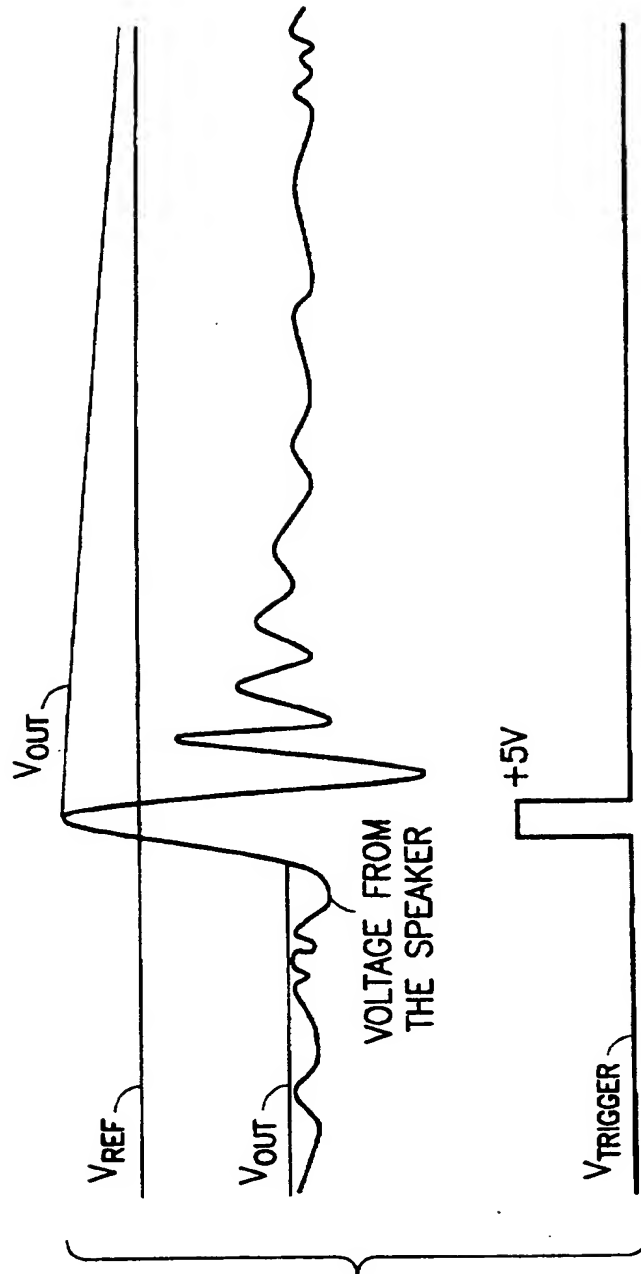


FIG.5

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 109 378 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
21.08.2002 Bulletin 2002/34

(51) Int Cl.7: **H04M 1/18**, **H04Q 7/32**,
G01M 7/08, **G01P 15/11**,
H04M 1/725

(43) Date of publication A2:
20.06.2001 Bulletin 2001/25

(21) Application number: **00310486.6**

(22) Date of filing: **27.11.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Helkkinen, Kari-Pekka**
90570 Oulu (FI)

(74) Representative: **Read, Matthew Charles et al**
Venner Shipley & Co.
20 Little Britain
London EC1A 7DH (GB)

(30) Priority: **16.12.1999 US 465102**

(71) Applicant: **Nokia Corporation**
02150 Espoo (FI)

(54) **Device and method for monitoring a shock experienced by a mobile telephone**

(57) A system is devised for utilizing the speaker in a mobile phone or other appliance as a transducer for monitoring the shock to which the appliance is subject-

ed. The shock signal is processed and stored signals relative to said shock and providing means to access said stored data.

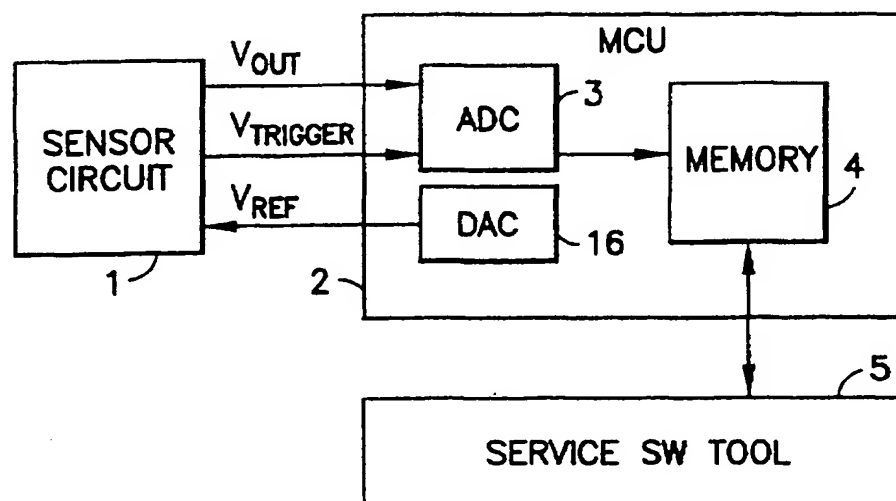


FIG.1

EP 1 109 378 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 31 0486

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 01, 31 January 2000 (2000-01-31) & JP 11 296765 A (KOKUSAI ELECTRIC CO LTD), 29 October 1999 (1999-10-29) * abstract * * figures 1,3 *	1,3,5,7, 9,10	H04M1/18 H04Q7/32 G01M7/08 G01P15/11 H04M1/725
A	US 5 742 666 A (ALPERT) 21 April 1998 (1998-04-21) * abstract * * column 3, line 6 - line 14 * * column 5, line 8 - line 23 * * column 6, line 59 - column 7, line 33 * * figures 1,2,3A *	1,3,5,7, 9,10	
A	EP 0 465 673 A (SUMITOMO ELECTRIC INDUSTRIES) 15 January 1992 (1992-01-15) * abstract * * page 3, line 3 - line 7 * * page 3, line 48 - line 52 * * page 4, line 11 - line 36 * * page 5, line 8 - page 6, line 41 * * figures 1-5 *	1,3,5,7, 9	
A	US 4 803 426 A (ODAGAWA ET AL) 7 February 1989 (1989-02-07) * abstract * * column 1, line 23 - line 38 * * column 1, line 50 - column 2, line 34 * * figures 1,2 *	1,3,5,7, 9	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 4 July 2002	Examiner Fragua, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document	

EPO FORM 1503 03 B2 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 31 0486

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>EP 0 936 794 A (NOKIA MOBILE PHONES LTD) 18 August 1999 (1999-08-18)</p> <p>* abstract *</p> <p>* column 1, line 49 - line 54 *</p> <p>* column 3, line 11 - line 19 *</p> <p>* column 9, line 30 - column 10, line 16 *</p> <p>* figures 1,6 *</p> <p>-----</p>	3,7,9,10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 4 July 2002	Examiner Fragua, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p>		<p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>.....</p> <p>& : member of the same patent family, corresponding document</p>	

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 31 0486

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-07-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 11296765	A	29-10-1999	NONE		
US 5742666	A	21-04-1998	NONE		
EP 0465673	A	15-01-1992	JP	3226673 A	07-10-1991
			JP	3257375 A	15-11-1991
			EP	0465673 A1	15-01-1992
			WO	9111723 A1	08-08-1991
US 4803426	A	07-02-1989	JP	2089003 C	02-09-1996
			JP	7113551 B	06-12-1995
			JP	63026520 A	04-02-1988
			DE	3785399 D1	19-05-1993
			DE	3785399 T2	02-09-1993
			EP	0254188 A2	27-01-1988
EP 0936794	A	18-08-1999	GB	2334412 A	18-08-1999
			EP	0936794 A2	18-08-1999
			JP	11355402 A	24-12-1999

EPO FORM P4039

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82